

Self Leveling Laser Level

Features

- With adjustable screws on the base.
- with tuning function for more accurate measurement.
- Power off will lock the core automatically.
- Accuracy: $\pm 0.5\text{mm/m}$
- Laser power: $< 1\text{mW}$
- Wavelength: 635nm
- The width of the laser line at the position of 5m : 3mm



Order No.831-0001


Laser Level Kit

Features:

- For both vertical and horizontal measurements.
- With adjustable base, which can be rotated at 360°
- Widely used in architecture, decoration, etc.

Technical Data:

- Accuracy: $\pm 1\text{mm}$ per meter
- Wave length: 650nm
- Power supply: $2 \times 1.5\text{V}$
- Vial Accuracy: $0.057^\circ = 1\text{mm}$ per meter.

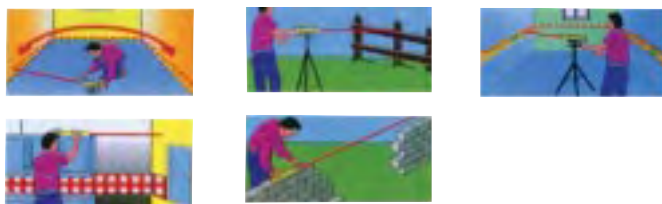

Order No. 831-0540

Angle Spirit Level

- With round angle gage
- Powder coat finish
- With 2 vials
- Length 47cm



Order No.831-8118

Ultrasonic Measuring Laser Level

Laser Level Function

- Laser: Class 2 (EN 60825-1)
- Output Power: $\leq 1\text{mW}$
- Wave Length: $630-680\text{nm}$
- Accuracy: $\pm 3\text{cm}$
- Complete with blow mould case.

Ultrasonic Distance Measurement

- Distance Range: $0.5-12\text{m}$
- Graduation: 1cm
- Accuracy: $\pm 3\text{cm}$
- Battery: $9\text{V } 6\text{F}22$
- Inch/mm conversion



Order No.831-0002

Notice:

Laser point shows where you aiming, while the ultrasonic beam takes an instant, accurate measurement and display the result on the LTD.

In order to get accuracy result, large, flat hard surface target is a must. Working under normal temperature from $10-30^\circ\text{C}$.

Digital Level

The digital level that combined with laser technology is the most advanced and easy use instrument today. It can display both degree and slope. The digital level can measure all angles in either a 360° range or 90° degree quadrants. The digital level also includes a backlight so the unit can be used day or night. Not only can this instrument measure with a surface at level or at right angles, it can measure the angles of all slopes rise and fall.

- Range: $4 \times 90^\circ (0-360^\circ)$
- Resolution: 0.1°
- Accuracy: $\leq 0.1^\circ$, other angle $\leq 0.2^\circ$
- Working temperature: $+5^\circ\text{C} \sim +40^\circ\text{C}$
- Working temperature: $\leq 85\% \text{RH}$
- Power: $\text{AAA}3\text{V } (1.5\text{V} \times 2)$



Ruler Length	Order No.
600mm	831-0060
800mm	831-0080
1000mm	831-0100
1200mm	831-0120

Spirit Levels

Type 99C



Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
16"/40cm	30pc	14/12kg	43x31x19cm	831-1240
20"/50cm	30pc	15.5/13.5kg	53x31x19cm	831-1250
24"/60cm	30pc	18/16kg	63x31x19cm	831-1260
32"/80cm	30pc	24.5/22.5kg	83x31x19cm	831-1280

Type 95B



Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
12"/30cm	60pc	16/14.5kg	31x27x36cm	831-1730
16"/40cm	60pc	19/17.5kg	41x27x36cm	831-1740
20"/50cm	60pc	21/19kg	51x27x36cm	831-1750
24"/60cm	60pc	26.5/24.5kg	61x27x36cm	831-1760

Type 94B



Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
16"/40cm	60pc	13.5/12kg	42x28x28cm	831-2440
20"/50cm	60pc	14.5/13kg	52x28x28cm	831-2450
24"/60cm	60pc	17.5/16kg	62x28x28cm	831-2460
32"/80cm	60pc	23.5/21.5kg	82x28x28cm	831-2480
40"/100cm	30pc	15.5/13.5kg	102x25x18cm	831-2500

Type 89



Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
16"/40cm	60pc	19/17kg	42x28x28cm	831-2640
20"/50cm	60pc	22/20kg	52x28x28cm	831-2650
24"/60cm	60pc	26.5/24.5kg	62x28x28cm	831-2660

Magnetic Spirit Levels

Type 98SB



Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
16"/40cm	60pc	15/13kg	41x25x26cm	831-3040
20"/50cm	60pc	17/15kg	51x25x26cm	831-3050
24"/60cm	60pc	19/17kg	61x25x26cm	831-3060
32"/80cm	30pc	15/13kg	81x20x16.5cm	831-3080
40"/100cm	30pc	17/15kg	101x20x16.5cm	831-3100

Telescoping Spirit Levels




Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
56-80cm	60pc	22/20kg	58x26x27cm	831-4080
60-80cm	60pc	23/21kg	62x26x27cm	831-4180
60-90cm	60pc	24/22kg	62x26x27cm	831-4090
70-100cm	60pc	26/24kg	72x26x27cm	831-4100
76-120cm	60pc	28/26kg	78x26x27cm	831-4120
80-120cm	30pc	16/14kg	82x23x16.5cm	831-4220
96-120cm	30pc	17/15kg	98x23x16.5cm	831-4320

Torpedo Levels



Spec	Qty/Pack	Gw/Nw	Packing Size	Order No.
9"	100pc	14/12kg	46x25x22.5cm(Case)	831-6029
9"	100pc		42x32x30cm(Skin Card)	831-6039

6" Pocket Size Rules



1/2" width

Order No. 638-9031


1/4" width

Order No. 638-9032

Stainless Steel Rulers



Thickness			Thickness		
Range	x Width	Order No.	Range	x Width	Order No.
100mm/4"	0.5x13mm	638-9041	500mm/20"	0.5x13mm	638-9203
150mm/6"	0.75x19mm	638-9061	600mm/24"	0.75x30mm	638-9241
150mm/6"	1.0x19mm	638-9062	600mm/24"	1.0x30mm	638-9242
150mm/6"	0.5x13mm	638-9063	600mm/24"	0.5x13mm	638-9243
200mm/8"	0.75x19mm	638-9081	1000mm/40"	1.0x30mm	638-9401
200mm/8"	1.0x19mm	638-9082	1000mm/40"	2.0x30mm	638-9402
200mm/8"	0.5x13mm	638-9083	1000mm/40"	2.0x40mm	638-9403
250mm/10"	0.75x19mm	638-9101	1000mm/20"	0.5x24mm	638-9404
250mm/10"	1.0x19mm	638-9102	1200mm/48"	1.0x30mm	638-9481
250mm/10"	0.5x13mm	638-9103	1200mm/48"	2.0x30mm	638-9482
300mm/12"	0.75x30mm	638-9121	1200mm/48"	2.0x40mm	638-9483
300mm/12"	1.0x30mm	638-9122	1200mm/48"	0.5x24mm	638-9484
300mm/12"	0.5x13mm	638-9123	1500mm/60"	1.0x30mm	638-9601
400mm/16"	0.75x30mm	638-9161	1500mm/60"	2.00x30mm	638-9602
400mm/16"	1.0x30mm	638-9162	1500mm/60"	2.00x40mm	638-9603
400mm/16"	0.5x13mm	638-9163	2000mm/80"	1.0x30mm	638-9801
500mm/20"	0.75x30mm	638-9201	2000mm/80"	2.0x30mm	638-9802
500mm/20"	1.0x30mm	638-9202	2000mm/80"	2.0x40mm	638-9803

Locking Steel Tapes



		Series 58	Series 56	Series 78	Series 53
Range	Tape Width	Order No.	Order No.	Order No.	Order No.
2m/6Feet	12.5mm	810-0006	810-0101	810-0121	810-0141
3m/ 10Feet	12.5mm	810-0010	810-0102	810-0122	810-0142
3m/10Feet	16mm	810-0011			
3m/10Feet	19mm	810-0012	810-0103	810-0123	810-0143
3.5m/12Feet	12.5mm	810-0013	810-0104	810-0124	810-0144
3.5m/12Feet	16mm	810-0014			
3.5m/12Feet	19mm	810-0015	810-0105	810-0125	810-0145
5m/16Feet	16mm	810-0016	810-0106		810-0146
5m/16Feet	19mm	810-0017	810-0107	810-0126	810-0147
5m/16Feet	25mm	810-0018	810-0109	810-0127	810-0148
5.5m/18Feet	19mm	810-0019		810-0128	
5.5m/18Feet	25mm	810-0020	810-0110	810-0129	810-0149
7.5m/25Feet	19mm	810-0021	810-0111		810-0150
7.5m/25Feet	25mm	810-0022	810-0112	810-0130	810-0151