


Platform Stackers


- Simple and easy operation, lifting movement via collapsible foot pedal, sensitive lowering through sinking valve, hand push drive, overload protection via pressure valve.
- Safe operation and secure working conditions, stable chassis with 2 frame rollers and 2 steering rollers.
- Long Service lift, robust construction, frame hard chromium plated, hardened chromium plated ram.
- Effortless movement, ball bearing rollers, polyurethane rollers.
- Practical drawer under the platform.

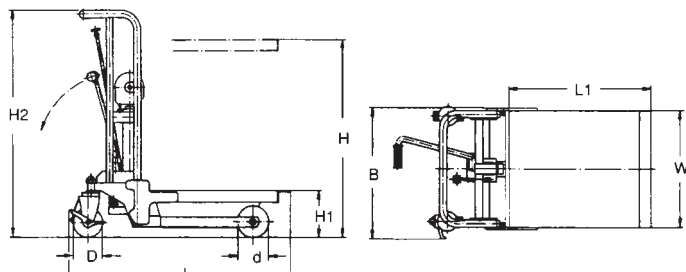

Order No.	838-4321	838-4322	838-4341	838-4342
Capacity	440lbs/200kg	440lbs/200kg	880lbs/400kg	880lbs/400kg
Max. Platform Height H	33.5"/850mm	47.2"/1200mm	33.5"/850mm	47.2"/1200mm
Min. Platform Height H1	7.9"/200mm	7.9"/200mm	7.9"/200mm	7.9"/200mm
Platform Length L1	23.6"/600mm	23.6"/600mm	25.6"/650mm	25.6"/650mm
Platform Width W	19.7"/500mm	19.7"/500mm	21.7"/550mm	21.7"/550mm
Total Width B	22"/560mm	22"/560mm	23.2"/590	23.2"/590
Total Length L	37"/940mm	37"/940mm	40.8"/1037mm	40.8"/1037mm
Total Height H2	37.8"/960mm	51.6"/1310mm	37.8"/960mm	51.6"/1310mm
Steering Rollers-Diameter D	4.9"/125mm	4.9"/125mm	5.9"/150mm	5.9"/150mm
Frame Rollers-Diameter d	5.1"/130mm	5.1"/130mm	5.9"/150mm	5.9"/150mm
Pump Handle Movements	0.6"/15mm	0.9"/23mm	1.2"/30mm	1.8"/45mm
Net Weight	99lbs/45kg	110lbs/50kg	145lbs/66kg	156lbs/71kg

Lift Tables

- New design to meet new CE norm EN 1757-3.
- New hydraulic system increases safety and protects your goods, stepless rate of lowering system remains irrespective of the weight of the load.

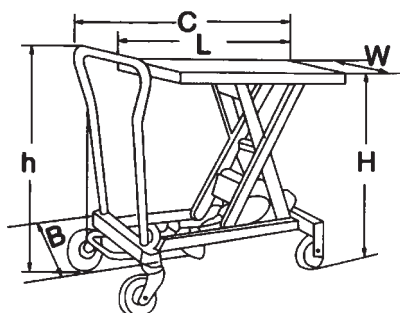

Capacity (lbs/kg)	Table Size LxW (inch/mm)	Table Height H(Min./Max.) inch(mm)	Handle Height h (inch/mm)	Wheel Dia. (inch/mm)	Overall Size BxC (inch/mm)	Foot Pedal to Max. Height (inch/mm)	Net Weight (lbs/kg)	Order No.
330/150	27.6x17.7"/700x450	10/30" (255/760)	39.4/1000	3.9/100	17.7x37.4"/450x950	0.6"/16	90/41	837-0015
550/250	32.7x19.7"/830x500	12.4/35.8" (315/910)	43.3/1100	4.9/125	19.7x39.8"/500x1010	1"/25	172/78	837-0025
1100/500	39.8x20.5"/1010x520	16.9/39.4" (430/1000)	44.5/1130	5.9/150	20.5x49.6"/520x1185	1.7"/44	260/118	837-0050
1650/750	39.8x20.5"/1010x520	17/39.4" (432/1000)	44.5/1130	5.9/150	20.5x49.6"/520x1260	2.2"/55	264/120	837-0075
2200/1000	39.8x20.5"/1010x520	17.3/37.8" (440/960)	44.5/1130	5.9/150	20.5x49.6"/520x1260	3"/75	301/137	837-0100
660/300	39.8x20.5"/1010x520	17.1/62.4" (435/1585)	44.5/1130	5.9/150	20.5x49.6"/520x1260	2.1"/53	330/150	837-0030
1100/500	39.8x20.5"/1010x520	17.1/62.4" (435/1585)	44.5/1130	5.9/150	20.5x49.6"/520x1260	2.7"/68	370/168	837-0051

Lift & Tilt Tables


Simplifies Parts Handling

The new Lift & Tilt Table are specifically designed to allow an operator to feed and unload parts from tote boxes or containers quickly and easily without lifting, bending, stretching, or reaching.

When in its lift and tilt position, the unit holds totes or containers at a comfortable working height and angle that allows operators to easily reach parts even at the bottom of the container.


The working table is elevated by means of a foot actuated hydraulic cylinder. As the table is raised, it automatically tilts to an angle of 45° at full elevation. Built-in retaining lip keeps containers in place.

European Style



European Style		
Order No.	837-1040	837-1080
Capacity (lbs/kg)	880/400	1760/800
Table Size LxW	32.7x20.5"/830x520mm	32.7x20.5"/830x520mm
Table Height of Front H1	17.3/39.4"(435/990mm)	17.3/39.4"(440/1000mm)
Table Height of Rear H2	17.1/39"(435/1550mm)	17.3/61.4"(440/1560mm)
Handle Height H3	44.5"/1130mm	44.5"/1130mm
Wheel Diameter	5.9"/150mm	5.9"/150mm
Overall Size BxC	20.5x53.3"/520x1355mm	20.5x53.3"/520x1355mm
Foot Pedal to Max. Height	2"/50mm	2.7"/68mm
Net Weight (lbs/kg)	271/123	319/145

American Style

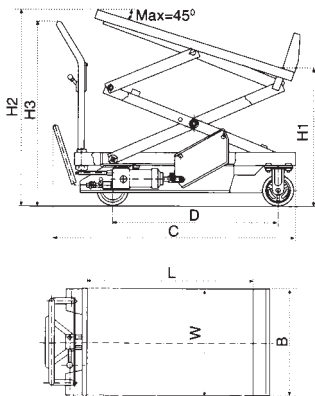


American Style		
Order No.	837-1182	837-1280
Capacity (lbs/kg)	400/182	616/280
Table Size LxW	29.7x19.7"/755x500mm	36.2x24.2"/920x615mm
Table Height of Front H1	12.8/31.5"(325/800mm)	14.6/36.6"(370/930mm)
Table Height of Rear H2	12.8/49.6"(325/1260mm)	14.6/60.2"(370/1528mm)
Handle Height H3	43.3"/1100mm	43.3"/1100mm
Wheel Base D	26.2"/665mm	30.7"/780mm
Overall Size BxC	19.7x39.4"/500x1000mm	24.2x43.3"/615x1100mm
Wheel Diameter	4.9"/125mm	4.9"/125mm
Foot Pedal to Max. Height	0.6"/15mm	0.9"/23mm
Net Weight (lbs/kg)	78/81	275/125

Transfer Lift Tables


Much easier for loading and unloading operations by means of ball transfer unit. As the steel balls are raised, the goods on table are very easy to move into or move away. As the steel balls are lowered, the goods stay on table firmly.

European Style



European style			
Order No.	837-1450	837-1700	837-2000
Capacity	990lbs/450kgs	1540lbs/700kgs	2200lbs/1000kgs
Table Size LxW	39.6x21.7" (1006x550mm)	39.6x21.7" (1006x550mm)	39.6x21.7" (1006x550mm)
Min./Max. Table Height	24.4/46.9" (620/1190mm)	24.5x46.9" (622x1190mm)	24.8x45.3" (630x1150mm)
Handle Height H3	44.5"/1130mm	44.5"/1130	44.5"/1130
Wheel Diameter	5.9"/150mm	5.9"/150	5.9"/150
Overall Size BxC	22.8x46.7" (580x1185mm)	22.8x46.7" (580x1260mm)	22.8x46.7" (580x1260mm)
Foot Pedal to Max. Height	1.7"/44mm	2.2"/55mm	3"/75mm
Net Weight	153kgs	155kgs	172kgs

American Style

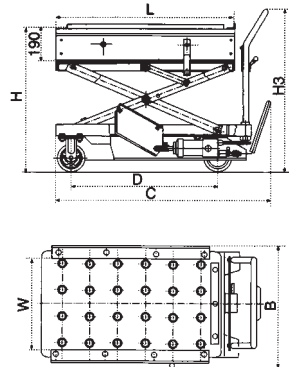

American style			
Order No.	837-1300	837-1500	
Capacity	600lbs/300kgs	1100lbs/500kgs	
Table Size LxW	29.1x19.3" (740x500mm)	35.6x24.4" (905x620mm)	
Min./Max. Table Height	18.3x39.4" (465/1000mm)	19.3/44.5" (490/1130mm)	
Handle Height H3	43.3"/1100mm	43.3"/1100mm	
Wheel Base D	26.2"/665mm	30.7"/780mm	
Overall Size BxC	22.8x39.4" (580x1000mm)	680x1100" (26.8x43.3mm)	
Wheel Diameter	4.9"/125mm	4.9"/125mm	
Foot Pedal to Max. Height	0.6"/16mm	1"/25mm	
Net Weight	198lbs/90kgs	339lbs/154kgs	