



Changeable Heads

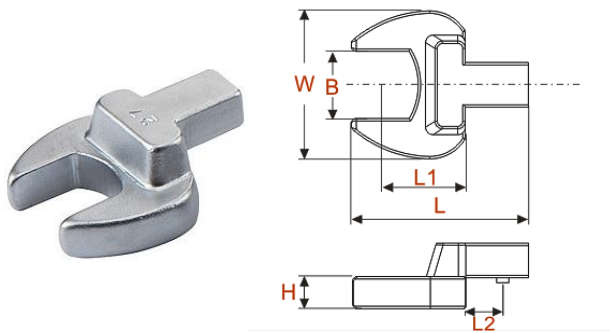

Model	B		W	H	L	L1	L2	Wt.
	mm	mm	mm	mm	mm	mm	mm	(g)
NKT7	7	9x12	24	5	36.9	17.5	11.5	38
NKT8	8		24	5	37.3	17.5	11.5	38
NKT9	9		24	5.5	37.7	17.5	11.5	39
NKT10	10		30	5.5	38.6	17.5	11.5	42
NKT11	11		30	5.5	38.6	17.5	11.5	43
NKT12	12		30	7	39	17.5	11.5	48
NKT13	13		30	7	41.9	20	11.5	52
NKT14	14		35	8	42.3	20	11.5	59
NKT15	15		35	8	42.7	20	11.5	59
NKT16	16		38	8.5	43.2	20	11.5	67
NKT17	17		38	8.5	43.6	20	11.5	67
NKT18	18		42	9	46	22	11.5	75
NKT19	19		42	9	46.4	22	11.5	75

Model	B		W	H	L	L1	L2	Wt.
	mm	mm	mm	mm	mm	mm	mm	(g)
NKK13	13	14x18	35	7	62.9	32	15	148
NKK14	14		35	8	63.3	32	15	154
NKK15	15		35	8	63.7	32	15	154
NKK16	16		38	9	64.2	32	15	173
NKK17	17		38	9	64.6	32	15	173
NKK18	18		42	10	65	32	15	192
NKK19	19		42	10	65.4	32	15	193
NKK21	21		50	11	66.3	32	15	217
NKK22	22		53	11	66.7	32	15	222
NKK24	24		53	11	67.5	32	15	225
NKK26	26		60	13	70.8	34	15	273
NKK27	27		60	13	70.8	34	15	281
NKK29	29		66	14	74.1	34	15	312
NKK30	30		66	14	74.1	34.8	15	312
NKK32	32		66	14	76.4	36	15	322

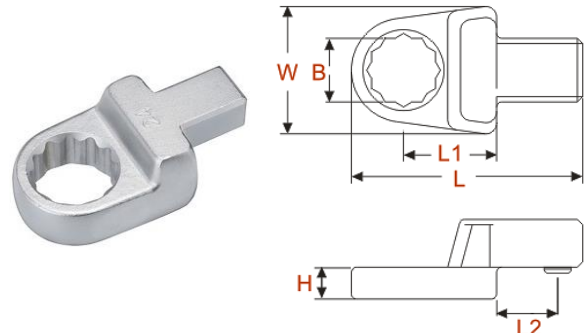

Model	B		W	H	L	L1	L2	Wt.
	mm	mm	mm	mm	mm	mm	mm	(g)
NKT7A	7	9x12	24.9	5.0	42.4	17.5	11.5	42
NKT8A	8		24.9	5.0	42.4	17.5	11.5	42
NKT9A	9		24.9	5.5	43.9	17.5	11.5	42
NKT10A	10		26.5	5.5	45.1	17.5	11.5	52
NKT11A	11		26.5	6.0	45.2	17.5	11.5	50
NKT12A	12		26.7	6.0	45.5	17.5	11.5	48
NKT13A	13		27.2	7.0	49.0	20	11.5	60
NKT14A	14		27.0	7.0	50.0	20	11.5	64
NKT15A	15		27.0	8.0	50.2	20	11.5	64
NKT16A	16		27.0	8.0	50.3	20	11.5	62
NKT17A	17		28.6	9.0	53.9	22	11.5	74
NKT18A	18		28.6	9.0	53.9	22	11.5	74
NKT19A	19		38.0	9.0	72.3	22	11.5	68

Model	B		W	H	L	L1	L2	Wt.
	mm	mm	mm	mm	mm	mm	mm	(g)
NKK13A	13	14x18	38.0	11.5	72.3	32	15	200
NKK14A	14		38.0	11.5	72.3	32	15	200
NKK15A	15		38.0	11.5	72.5	32	15	194
NKK16A	16		38.0	12.0	72.5	32	15	204
NKK17A	17		38.0	12.0	72.5	32	15	198
NKK18A	18		44.0	13.5	74.5	32	15	234
NKK19A	19		44.0	13.5	74.5	32	15	230
NKK21A	21		41.0	14.5	75.6	32	15	236
NKK22A	22		42.0	16.0	77.0	32	15	250
NKK24A	24		42.0	16.0	78.0	32	15	254
NKK26A	26		42.0	16.0	78.0	32	15	240
NKK27A	27		43.4	17.0	81.5	34	15	280
NKK29A	29		43.4	19.0	84.5	36	15	306
NKK30A	30		47.3	19.0	86.7	36	15	328
NKK32A	32		47.3	19.0	86.7	36	15	312

Warning: Face and eye protection must be worn while operating power tools per ANSI B186.1. Cutting tool maximum speed rating must be equal or exceed speed of air tool @ 90psi (620kpa). Use cutting tool manufacturer's mounting and operating instructions.

It is user's responsibility to refer and comply with ANSI B7.1