
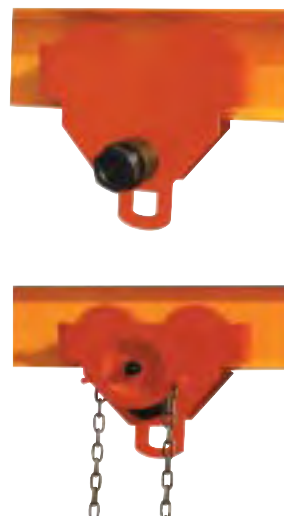


Plain & Geared Trolleys

- Conforms to ANSI/ASME safety standard.
- Double sealed ball bearings.
- Built in bumper guards.
- Adjustable to fit various sizes of flange and I-beams.
- Use on straight or curved track.
- Can be installed or removed at any point along the track.

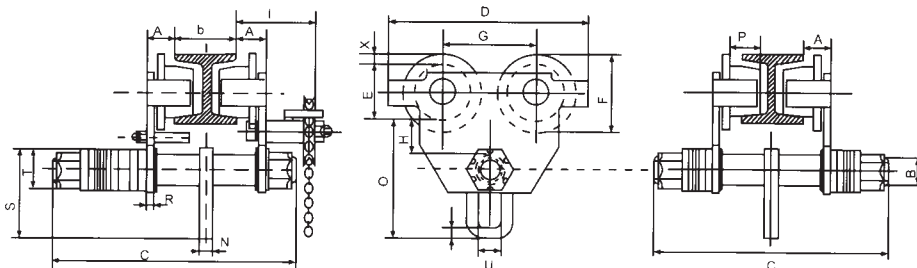

Capacity (Ton)	BeamFlange				Specifications															Plain Trolley Order No.	Geared Trolley Order No.
	Width (mm)	O	A	B	C	D	E	F	G	H	T	R	S	L	X	P	N	U	I		
0.5	2.5-5.5"	5"	0.9"	0.9"	9.1"	8.3"	2.3"	3.2"	4"	1.1"	1.7"	0.2"	3.7"	0.6"	0.5"	1"	0.4"	0.9"	4.5"	838-8705	838-8805
	64-140	128	22	24	230	212	58	82	102	28	44	6	95	15	12	26	10	24	113.5		
1	2.5-6"	5.6"	1"	1.2"	10"	10"	3"	4"	4.6"	1"	2"	0.3"	4.6"	0.6"	0.5"	1.1"	0.5"	1.2"	4.4"	838-8710	838-8810
	64-152	143	25	30	254	255	75	102	118	25	50	8	118	15	13.5	28	12	30.5	112.5		
2	3-6.5"	6.8"	1.1"	1.4"	11.6"	11.9"	3.5"	4.8"	5.4"	1.1"	2.4"	0.4"	5.7"	0.8"	0.6"	1.3"	0.6"	1.4"	4.4"	838-8720	838-8820
	76-165	172	27	36	294	302	90	122	137	27	60	10	145	20	16	34	14	36	112.5		
3	3-8"	8.3"	1.2"	1.7"	13.5"	13.5"	4.3"	5.6"	6.2"	1.3"	3.1"	0.5"	7.1"	1"	0.6"	1.5"	0.62"	1.8"	5.3"	838-8730	838-8830
	76-203	212	31	42	344	344	110	142	157	32	78	12	180	26	16	38	16	45	135		
5	3.5-8"	10"	1.4"	1.9"	14.2"	14.9"	4.8"	6.1"	6.8"	1.33"	3.5"	0.6"	8.7"	1.4"	0.7"	1.7"	0.8"	2.4"	5.35"	838-8750	838-8850
	88-203	254	36	48	360	378	122	156	172	34	90	16	220	35	17	44	20	60	136		
10	4.9-8"	12.6"	1.8"	2.4"	15.9"	17.5"	5.9"	7.4"	7.9"	1.4"	3.7"	1"	11.2"	1.8"	0.71"	1.9"	1"	3.2"	6.3"	838-8800	838-8910
	125-203	320	46	60	403	445	151	188	200	35	94	25	285	45	18	48	25	82	160		
20	5.7-8"	15.2"	2.7"	2.4"	18.7"	25.3"	7.9"	10.8"	11.8"	a2.2"	3.7"	1.2"	11.9"	2.8"	1.5"	2.4"	1.4"	4.3"	6"	838-8920	
	144-203	385	68	60	475	642	200	274	300	55	94	30	302	70	37	60	35	110	151.5		

Beam Clamps

- Conforms to ANSI/ASME safety standard.
- Capacity 1 to 5 ton.
- Clamp jaw is designed to reduce flange stress by distributing load away from I-beam flange edge.
- Can be mounted easily with threaded handle.
- Fits a wide range of flange widths and beams.
- Suspension bar provides lower headroom.

Order No.	838-8711	838-8712	838-8713	838-8715
Rated Load (lbs/kg)	2200/ 1000	4400/ 2000	6600/ 3000	11000/ 5000
Flange Width (inch) (mm)	3-8.7" 75-220	3-8.7" 75-220	3.1-12.6" 80-320	3.1-12.6" 80-320
Max.A (inch/mm)	10.2"/ 260	10.2"/ 260	13.9"/ 354	13.9"/ 354
Min.B (inch/mm)	7.1"/ 180	7.1"/ 180	9.3"/ 235	9.3"/ 235
Max.B (inch/mm)	14.2"/ 360	14.2"/ 360	19.3"/ 490	19.3"/ 490
C (inch/mm)	2.5"/ 64	2.9"/ 74	4.1"/ 103	4.3"/ 110
D (inch/mm)	0.2"/ 5	0.24"/ 6	0.3"/ 8	0.4"/ 10
E (inch/mm)	8.5"/ 215	8.5"/ 215	10.2"/ 260	10.2"/ 260
Max.F (inch/mm)	6.1"/ 155	6.1"/ 155	8.9"/ 225	8.9"/ 225
Min.F (inch/mm)	4"/ 102	4"/ 102	5.5"/ 140	5.5"/ 140
Min.G (inch/mm)	1"/ 25	1"/ 25	1.8"/ 45	1.8"/ 45
H (inch/mm)	0.9"/ 22	0.9"/ 22	0.94"/ 24	1.1"/ 28
Net Weight (lbs/kg)	10/ 4.5	11/ 5	23/ 10.5	24/ 11
Gross Weight (lbs/kg)	12/ 5.5	13/ 6	25/ 11.5	26/ 12
Packing Size (inch) (mm)	16.9x3.7x6.7" 430x95x170	16.9x3.7x6.7" 430x95x170	15.2x5.3x13.2" 385x135x335	15.2x5.3x13.2" 385x135x335

