



## Hand Pallet Trucks

- A built in overload valve and totally sealed hydraulic pump, seals of hydraulic pump are imported from Germany.
- Heavy duty 1 piece "C" section forks for greatest strength and durability, super strong frame can load Max. 3000kg.
- Two nylon entry and exit rollers prevent physical exertion of the operator and protect load wheels and pallet.
- Load Roller: Single or tandem nylon, polyurethane. steering wheel: nylon, polyurethane, rubber.

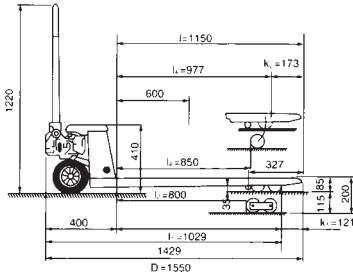

(mm)





| Order No.                       | 838-0201       | 838-0202       | 838-0251       | 838-0252       | 838-0301       | 838-0302       | 838-0221*      | 838-0222*      |
|---------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Capacity (lbs/kg)               | 4400/2000      | 4400/2000      | 5500/2500      | 5500/2500      | 6600/3000      | 6600/3000      | 4400/2000      | 4400/2000      |
| Max. Fork Height (inch)         | 7.9"(or 7.5")  | 7.9"(or 7.5")  | 7.9"(or 7.5")  | 7.9"(or 7.5")  | 7.9"(or 7.5")  | 7.9"(or 7.5")  | 7.9"(or 7.5")  | 7.9"(or 7.5")  |
| (mm)                            | 200(or 190)    | 200(or 190)    | 200(or 190)    | 200(or 190)    | 200(or 190)    | 200(or 190)    | 200(or 190)    | 200(or 190)    |
| Min. Fork Height (inch)         | 3.3"(or 2.9")  | 3.3"(or 2.9")  | 3.3"(or 2.9")  | 3.3"(or 2.9")  | 3.3"(or 2.9")  | 3.3"(or 2.9")  | 3.3"(or 2.9")  | 3.3"(or 2.9")  |
| (mm)                            | 85(or 74)      | 85(or 74)      | 85(or 74)      | 85(or 74)      | 85(or 74)      | 85(or 74)      | 85(or 74)      | 85(or 74)      |
| Fork Length (inch/mm)           | 45.3"/ 1150    | 48"/ 1220      | 45.3"/ 1150    | 48"/ 1220      | 45.3"/ 1150    | 48"/ 1220      | 45.3"/ 1150    | 48"/ 1220      |
| Width Overall Forks (inch/mm)   | 21.3"/ 540     | 26.8"/ 680     | 21.3"/ 540     | 26.8"/ 680     | 21.3"/ 540     | 26.8"/ 680     | 21.3"/ 540     | 26.8"/ 680     |
|                                 | 6.3"/160       | 6.3"/160       | 6.3"/160       | 6.3"/160       | 6.3"/160       | 6.3"/160       | 6.3"/160       | 6.3"/160       |
| Individual Fork Width (inch/mm) | φ 3.2(or 2.8") | φ 3.2(or 2.8") | φ 3.2(or 2.8") | φ 3.2(or 2.8") | φ 3.2(or 2.8") | φ 3.2(or 2.8") | φ 3.2(or 2.8") | φ 3.2(or 2.8") |
|                                 | φ 82 (or 72)   | φ 82 (or 72)   | φ 82 (or 72)   | φ 82 (or 72)   | φ 82 (or 72)   | φ 82 (or 72)   | φ 82 (or 72)   | φ 82 (or 72)   |
| Load Roller Diameter (inch)     | Nylon,         | Nylon,         | Nylon,         | Nylon,         | Nylon,         | Nylon,         | Nylon,         | Nylon,         |
| (mm)                            | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   |
|                                 | φ 7.9(or 7.1") | φ 7.9(or 7.1") | φ 7.9(or 7.1") | φ 7.9(or 7.1") | φ 7.9(or 7.1") | φ 7.9(or 7.1") | φ 7.9(or 7.1") | φ 7.9(or 7.1") |
|                                 | φ 200 (or 180) | φ 200 (or 180) | φ 200 (or 180) | φ 200 (or 180) | φ 200 (or 180) | φ 200 (or 180) | φ 200 (or 180) | φ 200 (or 180) |
| Steering Wheel Diameter (inch)  | Nylon, Rubber  | Nylon, Rubber  | Nylon, Rubber  | Nylon, Rubber  | Nylon, Rubber  | Nylon, Rubber  | Nylon, Rubber  | Nylon, Rubber  |
| (mm)                            | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   | Polyurethane   |
| Net Weight (lbs/kg)             | 165/ 75        | 172/ 78        | 169/ 77        | 176/ 80        | 187/ 85        | 194/ 88        | 165/ 75        | 172/ 78        |
| Quantities/20' Container(PCS)   | 180            | 144            | 180            | 144            | 180            | 144            | 180            | 144            |

\* Quick Lifting Pallet Truck : 5 pump strok to Max. fork height.


## Low Profile Pallet Trucks

Min. Lowered Height 55mm

- Rollers: Steel or nylon
- Wheels: Nylon, Polyurethane, Rubber.
- Special Fork Length: 950mm



| Capacity  | Min. Lowered Fork Height | Width Over Forks | Fork Length | Net Weight | Quantities in 20' container | Order No. |
|-----------|--------------------------|------------------|-------------|------------|-----------------------------|-----------|
| (lbs/kg)  | (inch/mm)                | (inch/mm)        | (inch/mm)   | (lbs/kg)   |                             |           |
| 4400/2000 | 2.1"/ 55mm               | 44.9"/ 1150      | 21.1"/ 540  | 158/72     | 180                         | 838-0261  |
| 4400/2000 | 2.1"/ 55mm               | 44.9"/ 1150      | 26.5"/ 680  | 169/77     | 144                         | 838-0262  |

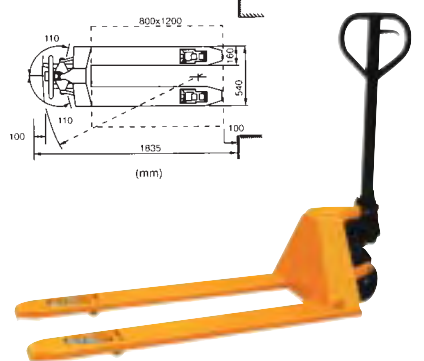

## Hand Pallet Trucks with Scale

| Scale Accuracy                  | Capacity  | Min./Max. Fork Height | Width Over Forks | Fork Length | Net Weight | Quantities in 20' Container | Order No.       |
|---------------------------------|-----------|-----------------------|------------------|-------------|------------|-----------------------------|-----------------|
| (Mettler-Toledo Sensor & scale) | (kg/lbs)  | (mm/inch)             | (mm/inch)        | (mm/inch)   | (mm/inch)  | (kg/lbs)                    |                 |
| 2000kg(4400lbs)                 | 2000/4400 | 85/200(3.3/7.9")      | 1150/45"         | 548/22"     | 168/6.6    | 85/187                      | 36 PCS 838-1201 |
| 2000kg(4400lbs)                 | 2000/4400 | 85/200(3.3/7.9")      | 1150/45"         | 688/27"     | 168/6.6    | 88/194                      | 32 PCS 838-1202 |
| 2000kg(4400lbs)                 | 2000/4400 | 85/200(3.3/7.9")      | 1150/45"         | 548/22"     | 168/6.6    | 85/187                      | 36 PCS 838-1203 |
| 2000kg(4400lbs)                 | 2000/4400 | 85/200(3.3/7.9")      | 1150/45"         | 688/27"     | 168/6.6    | 88/193                      | 32 PCS 838-1204 |



## Powered Pallet Trucks

### Heavy Duty Design

Smooth stepless speed control made in Europe


Power unit and drive wheel made in Europe

Powerfull traction battery

Conforms to EN1726 and EN 1175-1

#### Specification

| Order No.                               | 838-1506      | 838-1507        | 838-1508      | 838-1509      |
|-----------------------------------------|---------------|-----------------|---------------|---------------|
| Platform                                | Without       | Without         | With          | With          |
| Capacity(kg)                            |               | 2000            |               |               |
| Load Center(C, mm)                      |               | 600             |               |               |
| Max Fork Height(H,mm)                   |               | 205             |               |               |
| Lowered Fork Height(h,mm)               |               | 85              |               |               |
| Fork Length(L1, mm)                     |               | 1150            |               |               |
| Overall Fork Width(B, mm)               | 530           | 680             | 530           | 680           |
| Individual Fork Width(b,mm)             |               | 160             |               |               |
| Wheel Base(y,mm)                        |               | 1406            |               |               |
| Turning Radius(Wa,mm)                   | 1608          | 1608            | 1946          | 1946          |
| Traveling Speed with/without load(Km/h) |               | 3.6/5.4         |               |               |
| Lifting Speed with/without load(mm/s)   |               | 22/32           |               |               |
| Lowering Speed with/without load(mm/s)  |               | 50/55           |               |               |
| Drive Wheel                             |               | 1200W,Dia.250mm |               |               |
| Power Unit(Lifting motor)               |               | 800W/24V        |               |               |
| Traction Battery                        |               | 24V/210Ah,185Kg |               |               |
| Battery Charger                         |               | 25A/24V         |               |               |
| Overall Dimension(LxWxH,mm)             | 1781x690x1305 | 1781x690x1305   | 2125x690x1305 | 2125x690x1305 |
| Net Weight(without battery,kg)          | 324           | 329             | 338           | 343           |

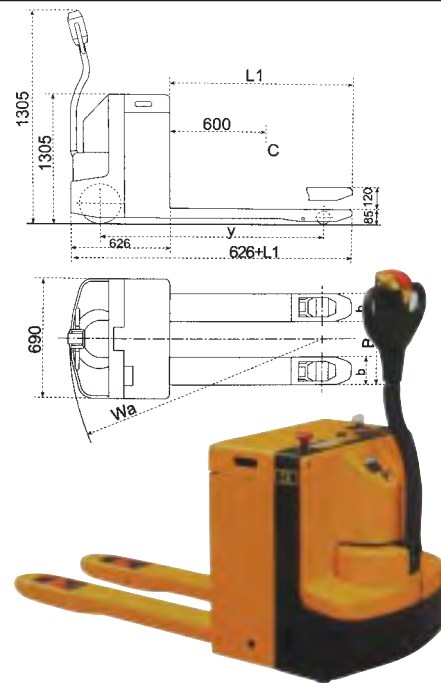

## Semi-Electric Pallet Trucks

### Capacity 1500kg

**Frame:** Heavy duty design with all-steel reinforced frame.

**Brake system:** Integral electromagnetic disk brake mounted on motor shaft.

**Power Source:** Two pieces 80AH/12V battery with separate charger. Battery weight: 30kg/pc.

**Drive Wheel:** Complete gear train mounted on ball and roller bearing in oil bath housing. High-torque horizontally mounted motor has copper graphite brushes for excellent commutation and fabrication motor: 660W/24V.


**Wheel :**  $\phi$  250x80mm

**Load Roller:** Tandem or Single Polyurethane Roller

**Tandem roller:**  $\phi$  78x70mm

**Single roller:**  $\phi$  78x100mm

**Traveling Speed:** With load 5km/h  
Without load 6.5km/h

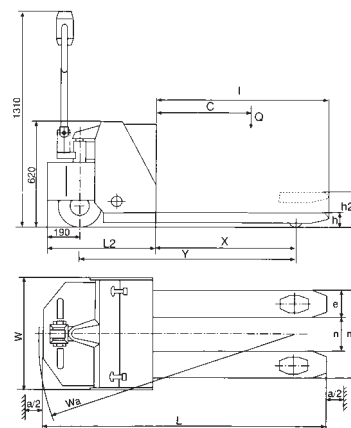


| Order No.               | 838-1501       | 838-1502       | 838-1503       | 838-1504       |
|-------------------------|----------------|----------------|----------------|----------------|
| Capacity                | 3300lbs/1500kg | 3300lbs/1500kg | 3300lbs/1500kg | 3300lbs/1500kg |
| Lowered Height          | h 3.3"/85mm    | 3.3"/85mm      | 3.3"/85mm      | 3.3"/85mm      |
| Max. Fork Height        | h2 8"/205mm    | 8"/205mm       | 8"/205mm       | 8"/205mm       |
| Fork Overall Width      | m 20.5"/520mm  | 20.5"/520mm    | 27"/680mm      | 27"/680mm      |
| Fork Length             | I 39"/1000mm   | 45"/1150mm     | 39"/1000mm     | 45"/1150mm     |
| Load Centre             | C 23.6"/600mm  | 25.6"/650mm    | 23.6"/600mm    | 25.6"/650mm    |
| Load Distance           | X 31"/795mm    | 37"/945mm      | 31"/795mm      | 37"/945mm      |
| Wheel Base              | Y 49"/1240mm   | 55"/1390mm     | 49"/1240mm     | 55"/1390mm     |
| Net Weight (no battery) | 8.5lbs/215kg   | 8.8lbs/223kg   | 8.9lbs/225kg   | 9.3lbs/235kg   |
| Overall Length          | L 64"/1635mm   | 70"/1785mm     | 64"/1635mm     | 70"/1785mm     |
| Overall Width           | W 26"/660mm    | 26"/660mm      | 26.8"/680mm    | 26.8"/680mm    |
| Overall Height          | H 52"/1310mm   | 52"/1310mm     | 52"/1310mm     | 52"/1310mm     |
| Dimension               | a 8"/200mm     | 8"/200mm       | 8"/200mm       | 8"/200mm       |
| Dimension               | n 8"/200mm     | 8"/200mm       | 14.2"/360mm    | 14.2"/360mm    |
| Dimension               | Wa 59"/1500mm  | 65"/1650mm     | 59"/1500mm     | 65"/1650mm     |



## Manual High Lift Hand Trucks

Capacity 1000kg (2200lbs)

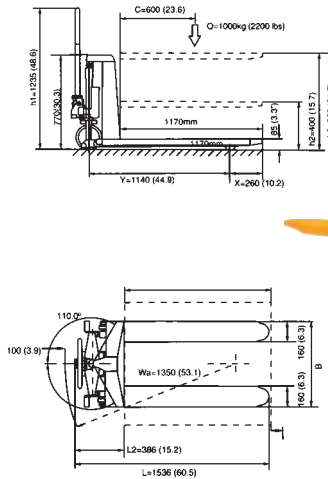

| Capacity<br>kg/lbs | Max. Fork<br>Height<br>mm/inch | Fork<br>Length<br>mm/inch | Overall Fork<br>Width (B)<br>mm/inch | Net<br>Weight<br>kg/lbs | Order No. |
|--------------------|--------------------------------|---------------------------|--------------------------------------|-------------------------|-----------|
| 1000/2200          | 800/31.5"                      | 1150/45.3"                | 540/21.3"                            | 110/242                 | 838-2101  |
| 1000/2200          | 800/31.5"                      | 1150/45.3"                | 680/26.8"                            | 125/275                 | 838-2102  |

## Hand Stackers

Capacity 1000kg

- Compact design and strong accurate steel construction
- Top quality hydraulic pump and cylinder with Germany seal kit.
- Heavy Duty 1 piece "C" section forks for greatest strength.
- Top of stroke bypass valve and overload valve built in.
- 3 way hand control with neutral allows the operator to maneuver the load safely and effortlessly.
- Advanced hand brake system, without foot brake system. It is a proven fact that there is less likelihood of injury when the operator always has both feet firmly on the ground.
- Random load rollers, steering wheels, with safety guard.





Order No. 838-4101




Order No. 838-4102

## Electric High Lift Hand Trucks

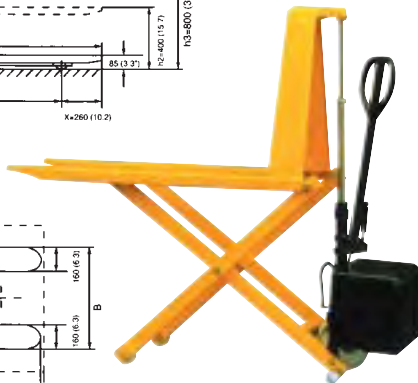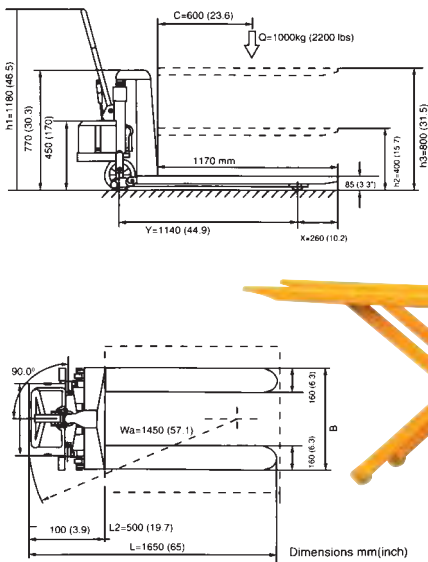

| Capacity<br>kg/lbs | Max. Fork<br>Height<br>mm/inch | Fork<br>Length<br>mm/inch | Overall Fork<br>Width (B)<br>mm/inch | Battery<br>VAH | Net<br>Weight<br>kg/lbs | Order No. |
|--------------------|--------------------------------|---------------------------|--------------------------------------|----------------|-------------------------|-----------|
| 1000/2200          | 800/31.5"                      | 1150/45.3"                | 540/21.3"                            | 12-60          | 110/242                 | 838-3101  |
| 1000/2200          | 800/31.5"                      | 1150/45.3"                | 680/26.8"                            | 12-60          | 125/275                 | 838-3102  |

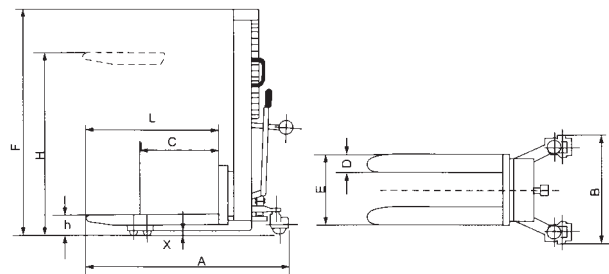


| Order No.                               | 838-4101   | 838-4102    |
|-----------------------------------------|------------|-------------|
| Capacity (lbs/kg)                       | 2200/1000  | 2200/1000   |
| Load Centre C (inch/mm)                 | 23"/585    | 23"/585     |
| Max. Fork Height H (inch/mm)            | 60"/1525   | 113.6"/2885 |
| Lowered Fork Height h (inch/mm)         | 3.5"/88    | 3.5"/88     |
| Fork Width D (inch/mm)                  | 6.3"/160   | 6.3"/160    |
| Fork Length L (inch/mm)                 | 46.1"/1170 | 46.1"/1170  |
| Overall Fork Width E (inch/mm)          | 21.3"/540  | 21.3"/540   |
| Ground Clearance X (inch/mm)            | 1.3"/32    | 1.3"/32     |
| Min. Turning Radius (Outside) (inch/mm) | 43.3"/1100 | 43.3"/1100  |
| Front Load Roller (inch)                | φ 3.1x3"   | φ 3.1x3"    |
| (mm)                                    | 80x75      | 80x75       |
| Steering Wheel (inch)                   | φ 5.9x2.2" | φ 5.9x2.2"  |
| (mm)                                    | 150x55     | 150x55      |
| Overall Length A (inch/mm)              | 61"/1550   | 61"/1550    |
| Overall Width B (inch/mm)               | 26.8"/680  | 26.8"/680   |
| Overall Height F (inch/mm)              | 80.7"/2050 | 76.8"/1950  |
| Net Weight (lbs/kg)                     | 507/230    | 816/370     |

## Semi-Electric Stackers

Capacity 1000kg, Lifting Height: 2450-3300mm

- Compact design and top quality mast construction.
- Safety guard on load roller and steering wheel.
- Light and easy manual steering system.

| Order No.                      | 838-5101         | 838-5102         | 838-5103         | 838-5104         |
|--------------------------------|------------------|------------------|------------------|------------------|
| Capacity (lbs/kg)              | 2200/1000        | 2200/1000        | 2200/1000        | 2200/1000        |
| Lifting Height                 | 96.5"/ 2450mm    | 112.2"/ 2850mm   | 122"/ 3100mm     | 130"/ 3300mm     |
| Lifting Speed with Load        | 2.8"/s ( 72mm/s) | 2.8"/ s(72mm/s)  | 2.8"/ s(72mm/s)  | 2.8"/ s(72mm/s)  |
| Lifting Speed without Load     | 4.3"/ s(110mm/s) | 4.3"/ s(110mm/s) | 4.3"/ s(110mm/s) | 4.3"/ s(110mm/s) |
| Power                          | 800W             | 800W             | 800W             | 800W             |
| Battery                        | 135AH/12V        | 135AH/12V        | 135AH/12V        | 135AH/12V        |
| Battery Charger                | 15AH/12V         | 15AH/12V         | 15AH/12V         | 15AH/12V         |
| Steering Wheel                 | φ 7.1x2"         | φ 7.1x2"         | φ 7.1x2"         | φ 7.1x2"         |
| Load Roller                    | φ 3.2x3.1"       | φ 3.2x3.1"       | φ 3.2x3.1"       | φ 3.2x3.1"       |
| Overall Dimension (LxWxH) (mm) | 1820x800x1800    | 1820x800x2000    | 1820x1090x2125   | 1820x1090x2225   |
| Net Weight (lbs/kg)            | 1014/460         | 1080/490         | 1169/530         | 1212/550         |

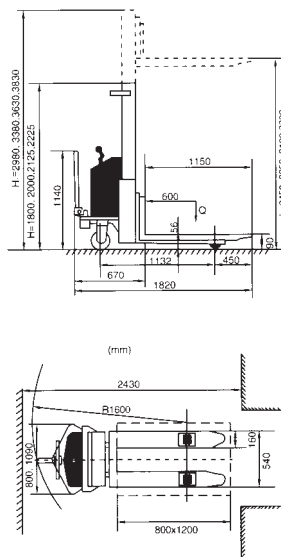

## Full Electric Stackers

Capacity 1200kg, 1500kg

Battery: 240AH/24V, 32kg/pcsx6pcs=192kg

Motors Traveling: 0.9KW/24V(capacity: 1200kg); 1.2KW /24V(capacity: 1500kg)



Motors Lifting: 2.2KW/24V

Front Roller: 1200kg: φ 82x80(single roller)  
1500kg: φ 82x80(tandem roller)

Rear Roller: φ 150x50mm

Drive Wheel: φ 250x80mm


- Heavy duty design-robust and stable.
- High quality European electronic control system-smooth and step less moving.
- Powerful power pack and drive wheel are made in Europe.

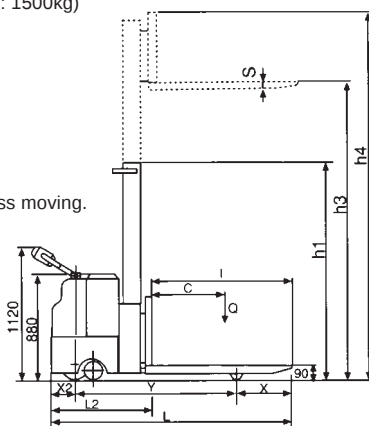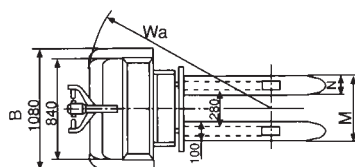

| Order No.                             | 838-5200   | 838-5201   | 838-5202   | 838-5203   | 838-5204    | 838-5205    | 838-5206    | 838-5207    | 838-5208    | 838-5209    |
|---------------------------------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Capacity (lbs/kg)                     | 2640/1200  | 3300/1500  | 2640/1200  | 3300/1500  | 2640"/1200  | 3300"/1500  | 2640/1200   | 3300/1500   | 2640/1200   | 3300/1500   |
| C (inch/mm)                           | 23.6"/600  | 23.6"/600  | 23.6"/600  | 23.6"/600  | 23.6"/600   | 23.6"/600   | 23.6"/600   | 23.6"/600   | 23.6"/600   | 23.6"/600   |
| I (inch/mm)                           | 45.3"/1150 | 45.3"/1150 | 45.3"/1150 | 45.3"/1150 | 45.3"/1150  | 45.3"/1150  | 45.3"/1150  | 45.3"/1150  | 45.3"/1150  | 45.3"/1150  |
| X (inch/mm)                           | 17.7"/450  | 17.7"/450  | 17.7"/450  | 17.7"/450  | 17.7"/450   | 17.7"/450   | 17.7"/450   | 17.7"/450   | 17.7"/450   | 17.7"/450   |
| S (inch/mm)                           | 2.2"/56    | 2.2"/56    | 2.2"/56    | 2.2"/56    | 2.2"/56     | 2.2"/56     | 2.2"/56     | 2.2"/56     | 2.2"/56     | 2.2"/56     |
| X2 (inch/mm)                          | 7.5"/190   | 7.5"/190   | 7.5"/190   | 7.5"/190   | 7.5"/190    | 7.5"/190    | 7.5"/190    | 7.5"/190    | 7.5"/190    | 7.5"/190    |
| Y (inch/mm)                           | 48.8"/1240 | 49.6"/1260 | 48.8"/1240 | 49.6"/1260 | 48.8"/1240  | 49.6"/1260  | 48.8"/1240  | 49.6"/1260  | 48.8"/1240  | 49.6"/1260  |
| L2 (inch/mm)                          | 28.7"/730  | 29.5"/750  | 28.7"/730  | 29.5"/750  | 28.7"/730   | 29.5"/750   | 28.7"/730   | 29.5"/750   | 28.7"/730   | 29.5"/750   |
| L (inch/mm)                           | 74"/1880   | 74.8"/1900 | 74"/1880   | 74.8"/1900 | 74"/1880    | 74.8"/1900  | 74"/1880    | 74.8"/1900  | 74"/1880    | 74.8"/1900  |
| M (inch/mm)                           | 21.3"/540  | 21.3"/540  | 21.3"/540  | 21.3"/540  | 21.3"/540   | 21.3"/540   | 21.3"/540   | 21.3"/540   | 21.3"/540   | 21.3"/540   |
| N (inch/mm)                           | 6.3"/160   | 6.3"/160   | 6.3"/160   | 6.3"/160   | 6.3"/160    | 6.3"/160    | 6.3"/160    | 6.3"/160    | 6.3"/160    | 6.3"/160    |
| H1 (inch/mm)                          | 82.3"/2090 | 82.3"/2090 | 71"/1800   | 71"/1800   | 79.7"/2025  | 79.7"/2025  | 83.7"/2125  | 83.7"/2125  | 87.6"/2225  | 87.6"/2225  |
| H3 (inch/mm)                          | 63"/1600   | 63"/1600   | 96.5"/2450 | 96.5"/2450 | 114.2"/2900 | 114.2"/2900 | 122"/3100   | 122"/3100   | 130"/3300   | 130"/3300   |
| H4 (inch/mm)                          | 90.6"/2300 | 90.6"/2300 | 124"/3150  | 124"/3150  | 141.7"/3600 | 141.7"/3600 | 149.6"/3800 | 149.6"/3800 | 157.5"/4000 | 157.5"/4000 |
| B (inch/mm)                           | 33"/840    | 33"/840    | 33"/840    | 33"/840    | 33"/840     | 33"/840     | 42.5"/1080  | 42.5"/1080  | 42.5"/1080  | 42.5"/1080  |
| Wa (inch/mm)                          | 59"/1500   | 59.8"/1520 | 59"/1500   | 59.8"/1520 | 59"/1500    | 59.8"/1520  | 59"/1500    | 59.8"/1520  | 59"/1500    | 59.8"/1520  |
| Net Weight (lbs/kg) (without battery) | 1351/614   | 1351/614   | 1474/670   | 1474/670   | 1522/692    | 1522/692    | 1551/705    | 1551/705    | 1571/714    | 1571/714    |

## Platform Stackers


- Simple and easy operation, lifting movement via collapsible foot pedal, sensitive lowering through sinking valve, hand push drive, overload protection via pressure valve.
- Safe operation and secure working conditions, stable chassis with 2 frame rollers and 2 steering rollers.
- Long Service lift, robust construction, frame hard chromium plated, hardened chromium plated ram.
- Effortless movement, ball bearing rollers, polyurethane rollers.
- Practical drawer under the platform.

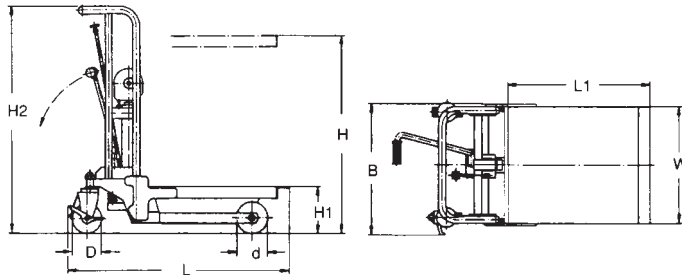

| Order No.                   | 838-4321     | 838-4322     | 838-4341     | 838-4342     |
|-----------------------------|--------------|--------------|--------------|--------------|
| Capacity                    | 440lbs/200kg | 440lbs/200kg | 880lbs/400kg | 880lbs/400kg |
| Max. Platform Height H      | 33.5"/850mm  | 47.2"/1200mm | 33.5"/850mm  | 47.2"/1200mm |
| Min. Platform Height H1     | 7.9"/200mm   | 7.9"/200mm   | 7.9"/200mm   | 7.9"/200mm   |
| Platform Length L1          | 23.6"/600mm  | 23.6"/600mm  | 25.6"/650mm  | 25.6"/650mm  |
| Platform Width W            | 19.7"/500mm  | 19.7"/500mm  | 21.7"/550mm  | 21.7"/550mm  |
| Total Width B               | 22"/560mm    | 22"/560mm    | 23.2"/590    | 23.2"/590    |
| Total Length L              | 37"/940mm    | 37"/940mm    | 40.8"/1037mm | 40.8"/1037mm |
| Total Height H2             | 37.8"/960mm  | 51.6"/1310mm | 37.8"/960mm  | 51.6"/1310mm |
| Steering Rollers-Diameter D | 4.9"/125mm   | 4.9"/125mm   | 5.9"/150mm   | 5.9"/150mm   |
| Frame Rollers-Diameter d    | 5.1"/130mm   | 5.1"/130mm   | 5.9"/150mm   | 5.9"/150mm   |
| Pump Handle Movements       | 0.6"/15mm    | 0.9"/23mm    | 1.2"/30mm    | 1.8"/45mm    |
| Net Weight                  | 99lbs/45kg   | 110lbs/50kg  | 145lbs/66kg  | 156lbs/71kg  |

## Lift Tables

- New design to meet new CE norm EN 1757-3.
- New hydraulic system increases safety and protects your goods, stepless rate of lowering system remains irrespective of the weight of the load.

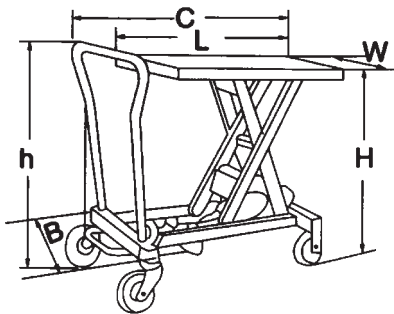

| Capacity<br>(lbs/kg) | Table Size<br>LxW<br>(inch/mm) | Table Height<br>H(Min./Max.)<br>inch(mm) | Handle<br>Height<br>h<br>(inch/mm) | Wheel<br>Dia.<br>(inch/mm) | Overall<br>Size<br>BxC<br>(inch/mm) | Foot Pedal<br>to<br>Max. Height<br>(inch/mm) | Net<br>Weight<br>(lbs/kg) | Order No. |
|----------------------|--------------------------------|------------------------------------------|------------------------------------|----------------------------|-------------------------------------|----------------------------------------------|---------------------------|-----------|
| 330/150              | 27.6x17.7"/700x450             | 10/30" (255/760)                         | 39.4/1000                          | 3.9/100                    | 17.7x37.4"/450x950                  | 0.6"/16                                      | 90/41                     | 837-0015  |
| 550/250              | 32.7x19.7"/830x500             | 12.4/35.8" (315/910)                     | 43.3/1100                          | 4.9/125                    | 19.7x39.8"/500x1010                 | 1"/25                                        | 172/78                    | 837-0025  |
| 1100/500             | 39.8x20.5"/1010x520            | 16.9/39.4" (430/1000)                    | 44.5/1130                          | 5.9/150                    | 20.5x49.6"/520x1185                 | 1.7"/44                                      | 260/118                   | 837-0050  |
| 1650/750             | 39.8x20.5"/1010x520            | 17/39.4" (432/1000)                      | 44.5/1130                          | 5.9/150                    | 20.5x49.6"/520x1260                 | 2.2"/55                                      | 264/120                   | 837-0075  |
| 2200/1000            | 39.8x20.5"/1010x520            | 17.3/37.8" (440/960)                     | 44.5/1130                          | 5.9/150                    | 20.5x49.6"/520x1260                 | 3"/75                                        | 301/137                   | 837-0100  |
| 660/300              | 39.8x20.5"/1010x520            | 17.1/62.4" (435/1585)                    | 44.5/1130                          | 5.9/150                    | 20.5x49.6"/520x1260                 | 2.1"/53                                      | 330/150                   | 837-0030  |
| 1100/500             | 39.8x20.5"/1010x520            | 17.1/62.4" (435/1585)                    | 44.5/1130                          | 5.9/150                    | 20.5x49.6"/520x1260                 | 2.7"/68                                      | 370/168                   | 837-0051  |