


Digital Torque Wrench

Square Drive Digital Torque Wrench with and without Angle

Model	A	Range Nm	W mm	H mm	B mm	L mm	D mm	D1 mm	Wt. kg
NK30DTV	1/4"	3-30	28.5	21.7	7.3	360	25.5	38.0	0.75
NK30DTR	3/8"	3-30	28.5	21.7	7.3	360	25.5	38.0	0.75
NK50DTR	3/8"	5-50	28.5	26.8	11.0	360	25.5	38.0	0.76
NK100DTR	3/8"	10-100	35.6	35.1	11.0	440	25.6	37.3	0.95
NK100DT	1/2"	10-100	35.6	35.1	15.7	440	25.6	37.3	1.06
NK200DT	1/2"	20-200	46.0	40.0	15.7	524	25.6	37.3	1.35
NK350DT	1/2"	35-350	46.0	40.0	15.7	640	25.6	37.3	1.9
NK30DTVA	1/4"	3-30	28.5	21.7	7.3	360	25.5	38.0	0.75
NK30DTRA	3/8"	3-30	28.5	21.7	7.3	360	25.5	38.0	0.75
NK50DTRA	3/8"	5-50	28.5	26.8	11.0	360	25.5	38.0	0.76
NK100DTRA	3/8"	10-100	35.6	35.1	11.0	440	25.6	37.3	0.95
NK100DTA	1/2"	10-100	35.6	35.1	15.7	440	25.6	37.3	1.06
NK200DTA	1/2"	20-200	46.0	40.0	15.7	524	25.6	37.3	1.35
NK350DTA	1/2"	35-350	46.0	40.0	15.7	640	25.6	37.3	1.9



Models with Angle Measurement

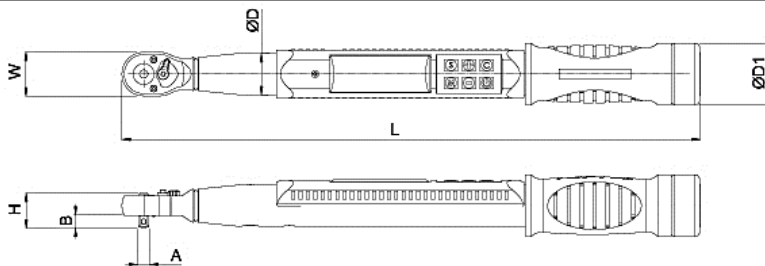


Open End Digital Torque Wrench with and without Angle

Item No.	A mm	Range Nm	W mm	H mm	L mm	D mm	D1 mm	Wt. kg
NK30DTO	9 x 12	3-30 Nm	22.0	19.0	350	25.5	38.0	0.55
NK30DTOV	14 x 18	3-30 Nm	22.0	19.0	350	25.5	38.0	0.55
NK50DTO	14 x 18	5-50 Nm	31.1	21.8	350	25.5	38.0	0.66
NK100DTO	9 x 12	10-100 Nm	31.1	21.8	416	25.6	37.2	0.84
NK100DTOV	14 x 18	10-100 Nm	31.1	21.8	416	25.6	37.2	0.84
NK200DTO	14 x 18	20-200 Nm	31.1	21.8	491	25.6	37.2	1.15
NK350DTO	14 x 18	35-350 Nm	31.1	21.8	630	25.6	37.2	1.7
NK30DTOA	9 x 12	3-30 Nm	22.0	19.0	350	25.5	38.0	0.55
NK30DTOVA	14 x 18	3-30 Nm	22.0	19.0	350	25.5	38.0	0.55
NK50DTOA	14 x 18	5-50 Nm	31.1	21.8	350	25.5	38.0	0.66
NK100DTOA	9 x 12	10-100 Nm	31.1	21.8	416	25.6	37.2	0.84
NK100DTOVA	14 x 18	10-100 Nm	31.1	21.8	416	25.6	37.2	0.84
NK200DTOA	14 x 18	20-200 Nm	31.1	21.8	491	25.6	37.2	1.15
NK350DTOA	14 x 18	35-350 Nm	31.1	21.8	630	25.6	37.2	1.70



Models with Angle Measurement

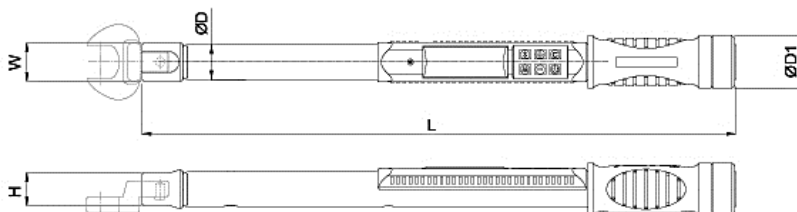

Accuracy: $\pm 1\%$
 Memory: 10 Readings
 Unit Selection: Nm, ft.lb, in.lb, kg-m
 Operating Temperature: $-10^{\circ}\text{C} \sim 55^{\circ}\text{C}$
 Storage Temperature: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
 RS-232 Data Out
 Humidity: 0~90%
 Mode: Peak, Track
 Battery: 1.5V AA Batteries * 3

Warning: Face and eye protection must be worn while operating power tools per ANSI B186.1. Cutting tool maximum speed rating must be equal or exceed speed of air tool @ 90psi (620kpa). Use cutting tool manufacturer's mounting and operating instructions.

It is user's responsibility to refer and comply with ANSI B7.1